
series

TELESCOBIC VEHICLE RECOVERY







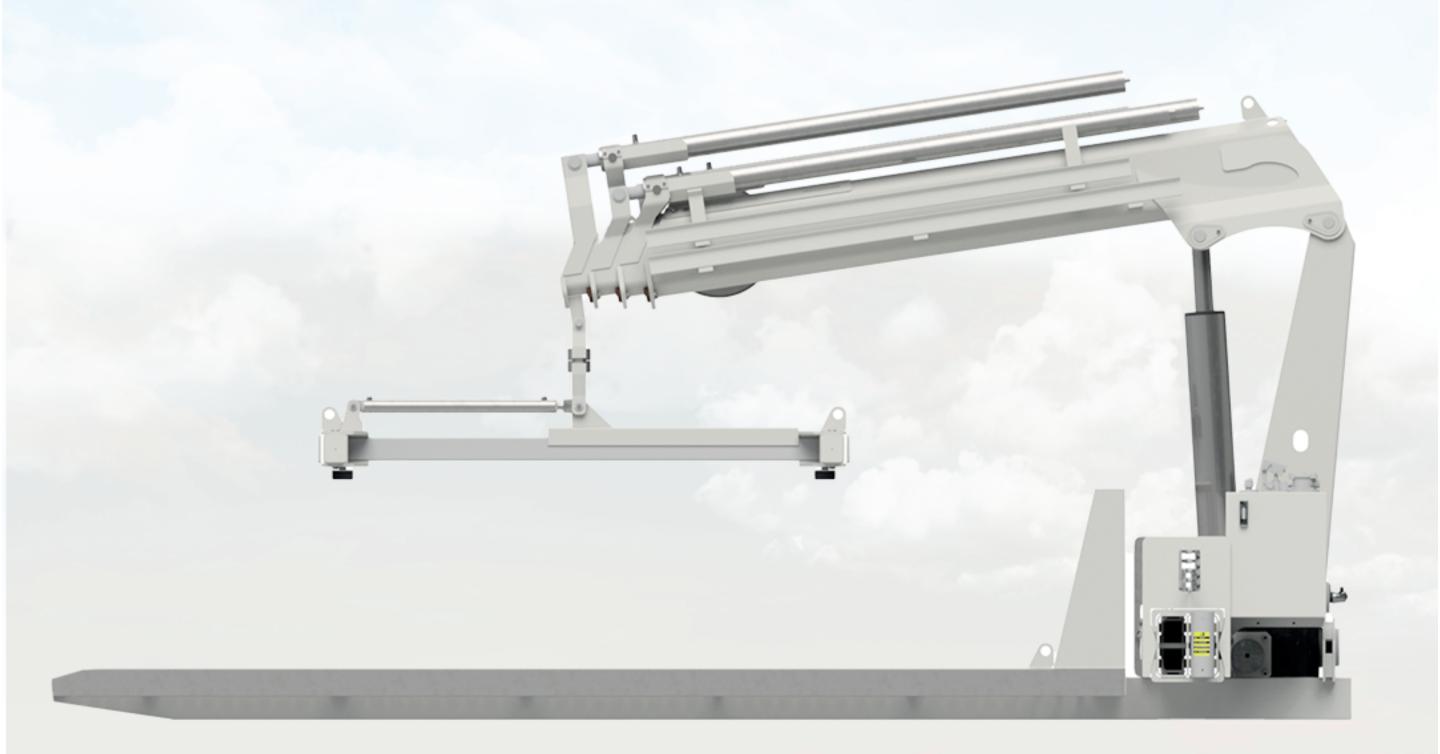

















1. Equipment Dimensions

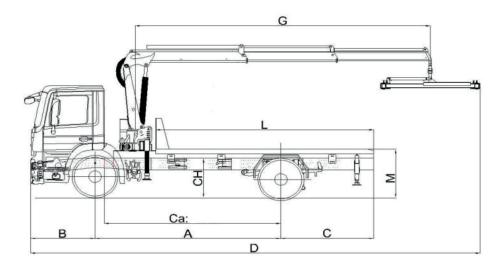

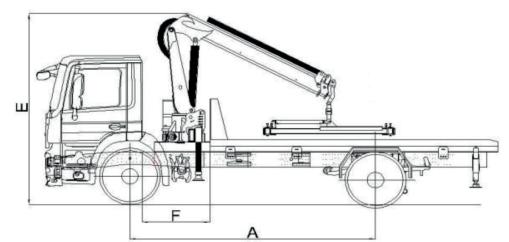

	Equi	pment Dimensions List	
Letter Code	OKG 11(2-3 BOM)	OKG 15(3-4 BOM)	OKG 20(3-4 BOM)
*A	4160 mm	4000 mm	4200 mm
*B	-	-	-
*[-	-	-
*Ca	-	-	-
*CH	-	-	-
*0	-	-	-
*E			
*F	1050 mm	1050 mm	1050 mm
*G	6600 mm(3 BOM)	8910 mm(3 BOM) 10400(4 BOM)	8500(3 BOM) 10400(4 BOM)
L	4750 mm	4750 mm	4750 mm
*M	-	-	-
pment Weight (kg, ±%3)	Determined by the Sketch Study	Determined by the Sketch Study	Determined by the Sketch Study


Dimensions are final dimensions. The dimensions and weights may vary depending on the crane and vehicle that will be used.

2.Technical Features

OKG			
Maximum Lifting Capacity	11-15-20 Tons/Meter		
Pump Capacity	40-60 lt/min.		
Maximum Operating Pressure	180 Bar		
Maximum Turning Angle	360°		
BOM Operating Angle	+75°/-15°		

3. Hydraulic Features

Hydraulic Features				
	Pump Types	Gear Pump		
_	Operating Pressure	180 bar		
Pump	Pump Flow Rate	OKG		
		40-60 lt/min		
		* Pump values may differ depending on motor output speed. Motor output speed Max. 1000rpm		
	Capacity -	OKG		
0:1 Tl.		80 – 120 lt		
Oil Tank	Suction Filter	125 µс		
	Return Filter	25 μc		

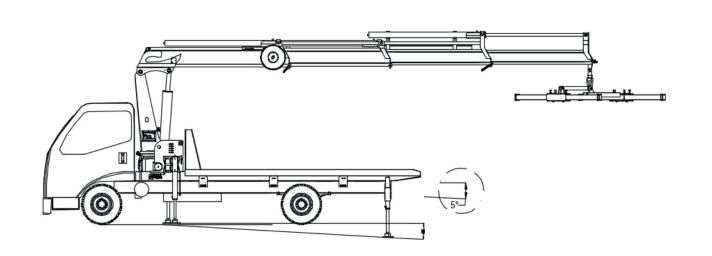





4.Optional Features

Hydraulic Control System	Manual
Inner Cabin Control	Touch-screen Control Button Control
Beacon Light	
Camera	
CANBUS - ECU	

Recorder	THE PARTY NAMED IN
Mud Guards	
Warning System	
Bicycle Stand	

Please contact ORAKÇI MAKİNA for optional requests.

5. Following the analysis of each designed equipment via the programs, mass production of them is carried out after testing for at least 6 months in the field test.

6. CKD-SKD and Disassembled production can be performed. Production can be made in line with business models depending on customer and market needs.

7. Through the installation of a closed-circuit camera system in the driver's cabin, the communication of the driver with the operators is increased and work safety is ensured. Ease of use is offered via an optional touch screen.

8. 1-year product warranty and 10-year spare parts supply warranty are provided







